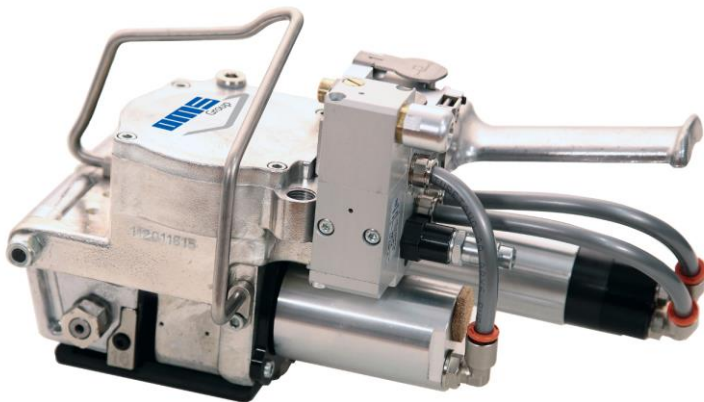


	OMSTRAP
OMS 12/16-19mm	<p>Pneumatic tool</p> <p>Use PET strap 16-19 mm</p> <p>Strap thickness from 1 to 1,4 mm.</p> <p>Ideal for vertical and horizontal ties.</p> <p>Automatic tension functions with button</p> <p>Vibrating sealing</p> <p>Easy handling, low operation cost.</p> <p>Machine weight 5,1 Kg.</p> <p>Air consumption 14 l/s pressure 4,5/7 bars</p> <p>tension 5000 N</p> <p>Engine speed and tension 6 m/min</p> <p>Tension and sealing easily adjustable.</p> <p>Series suspension hook for use with balancer</p>
	 <p>OMS 12</p>