
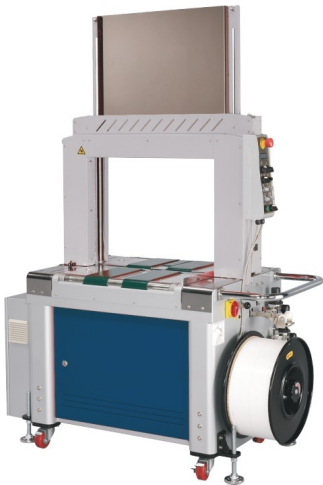


	OMSTRAP
<b>SM 702 B</b> <b>Belt-driven table</b>	<p><b>High productivity Belt driven table</b> automatic strapping machine:  Standard arch 550x500 or 650x500 (W x H)  <b>Electronical strap tensioning from 1 to 40 Kgs.</b>  <b>Single, double or timed strapping. Function just for transit</b>  <b>Charge and change roll from the outside</b>  <b>Close loop ejector in case of strapping with no package</b>  Opens wide for quick inspection and maintenance  <b>Speed belt from 10 to 60 m/min. adjustable with inverter</b>  Working table height adjustable from 800 to 900 mm.  <b>Minimum dimensions coils 130 x 120 x 20 (L x W x H)</b>  condizioni di reggiatura intervallo pacchi minimo 200 mm  Coils weight 10 to 35 Kgs. (recommended opt press for lower weights)  <b>Productivity 20 coils/min with double parallel strapping</b>  <b>productivity 40 coils/min with single central strapping</b>  Inside strap core 200 mm.  Use strap 5/9/12 mm  <b>Lateral protection barriers panels</b>  Control panel located on the right side of the operator  Standard voltage 380 V triphase/50 Hz./0,85 Kw.  dimensions 1400(W) x 650(D) x 1397/1950 with press (H)  Machine weight 250 kg.</p>
<b>OPTIONAL</b>  <b>SM 702 BP</b> <b>SM 702 BS</b> <b>Protections</b> <b>Adjustable height</b> <b>PLC</b>	<p>Machine equipped with <b>press coil held</b> adjustable from 10 to 50 Kg  Stainless steel machine  Lateral protection barriers panels  working table from 50 to 900 mm  Electronical management with PLC siemens</p>
	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p><b>SM 702 B</b></p> </div> <div style="text-align: center;">  <p><b>SM 702 BP</b></p> </div> </div>