
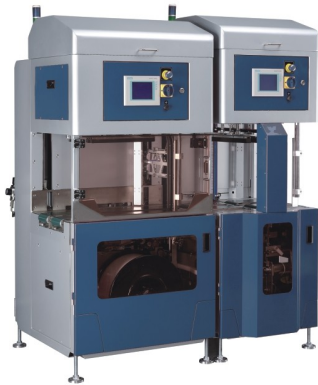


	OMSTRAP
SM 702 NIL tandem	Automatic advanced 5 mm tandem strapping machine composed by two strapping machine one in line: Strapping a minute single 31 packages a minute strap 5/9 inside core 200 external core 480 mm. Strap tensioning from 1 to 32 Kgs. adjustable Belt speed adjustable with inverter from 10 to 60 m/minute Automatic disobstruction and loop ejector Single strapping or transit function Change roll with automatic charge Working table height adjustable from 800 to 900 mm. Dimension products 120/450 x 10/400 x 210/500 (W x H x L) Max coils weight 25 Kg Standard voltage 380V triphase/50 Hz. 2,0 Kw Machine weight 460+420=880 Kg. Machine dimensions 1250 x 1520 x 2300/2400 (L x P x H) Pneumatic double press 6 bar adjustable from 15 to 40 kg Air consumption 1,4 litre/cycle Opens wide for quick inspection and maintenance Security panel safety standard CE with press over 25 kg Managemet function with PLC SIEMENS Bright lamps for emergency signal
OPTIONAL	Energy saving with auto stand by Transit function for light packages Inside core roll 150 mm Pneumatic lateral squaring Working table height adjustable from 730 to 830 mm. Movement wheels
	 SM 702 NIL tandem